



Bello N

DOWNLIGHTS



Description

Bello N, LED Downlight, uses SMD LEDs for indoor applications. Housing is made of High-Pressure, Die-casted Aluminum with powder coating.

Product Features

- SMD LEDs
- High-quality Opal diffuser
- Installation: Recessed Mounted
- 0-1/10V dimming, DALI dimming, emergency (optional)
- IP rating: IP20
- Life-span: 50,000 hours

Electrical Specifications


- Rated Supply Voltage: 220-240V
- Frequency: 50/60Hz

Applications






Technical Drawing

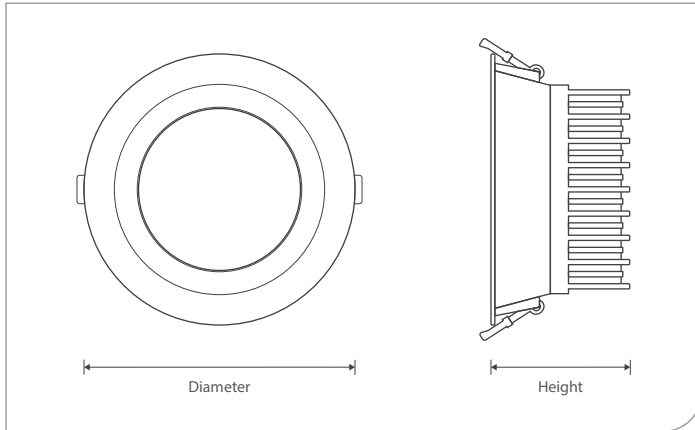


Dimensions

Model	Diameter	Height
DUBEN-03	Φ 100mm	50mm
DUBEN-06	Φ 118mm	60mm
DUBEN-09	Φ 145mm	72mm
DUBEN-15	Φ 170mm	80mm
DUBEN-20	Φ 192mm	90mm
DUBEN-30	Φ 230mm	100mm


Photometric Diagrams

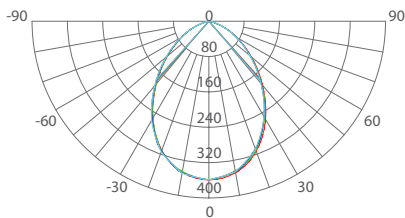

DUBEN-09

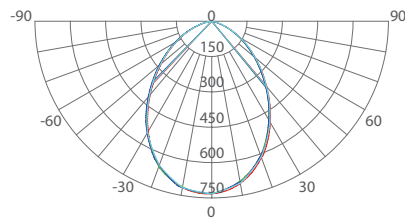

DUBEN-20

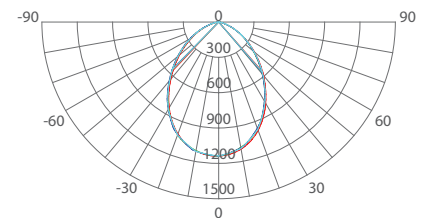

DUBEN-30

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [K]	Beam angle	Cut-out [mm]	CRI [Ra]
DUBEN-03	3W	SMD LEDs	234 lm	78 lm/W	3000K 4000K 6500K	120°	80mm	>80
DUBEN-06	6W		468 lm	78 lm/W			98mm	
DUBEN-09	9W		720 lm	80 lm/W			125mm	
DUBEN-15	15W		1200 lm	80 lm/W			145mm	
DUBEN-20	20W		1660 lm	83 lm/W			165mm	
DUBEN-30	30W		2490 lm	83 lm/W			200mm	